

ROTARY CONDUCTIVE PLASTIC SERVO POTENTIOMETER

RCP-22



Bush Mounting



Servo Mounting

NEW

Aluminium Housing
Metal Shaft
Mech.
Elec.

Ø 22 mm x L 12 mm
Ø 6.35 mm x L 15 mm
360°
(1) 340° (2) 100° (3) 60°

NEW



Estd : 1959




Pankaj

ISO 9001:2015 Certified Company

MULTI WIRE CONDUCTIVE PLASTIC POTENTIOMETER MW-CP-20

- 20 mm square housing made of strong glass reinforced engineering plastic
- 5 mm Diameter spring return plunger
- Flange mounting
- 10 mm or 20 mm Electrical travel
- Bellow on Plunger
- Gold Plated PCB Terminals
- Precious Metal Multi Wire wiper contact
- Long life
- Infinite resolution
- IP 68 Tested


NEW

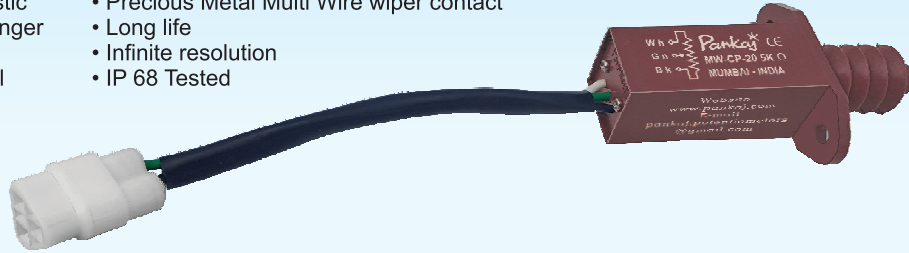

SHORT STROKE CONDUCTIVE PLASTIC POTENTIOMETER



LCP - 10 10 mm Travel
LCP - 20 20 mm Travel

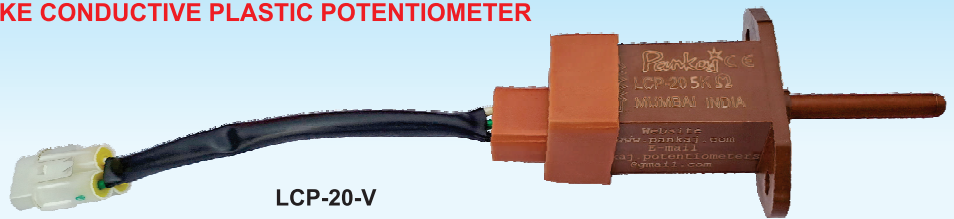

LCP-20-V

20mm Sq., flange mounting
Resistance: 1K, 5K, 10KΩ
Supplied with wires and connector

NEW

NEW

ROTARY CONDUCTIVE PLASTIC SERVO POTENTIOMETER



RCP-35-A

35mmφ, 24.5mm Height,
Shaft 6mmφ, 15mm long,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ



RCP-35-AG



RCP-50-A

50mmφ, 24.5mm Height,
Shaft 6mmφ, 15mm long,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ
C Clamp for Mounting

NEW



HOLLOW SHAFT
HSCP-50-A

NEW

50mmφ, 24.5mm Height,
Hollow Shaft 6mmφ,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ
C Clamp for Mounting

SINGLE TURN CONDUCTIVE PLASTIC POTENTIOMETER


SCP-25



25mmφ, 18mm Height
Resistance: 1K, 5K, 10KΩ

SQUARE CONDUCTIVE PLASTIC POTENTIOMETERS


SQCP-55



High Engineering Plastic Moulded Housing
Precious Metal Multi Wire Wiper Contacts
55mm Square Potentiometers x 11mm Height
6mm Square Rotor
1K, 5K & 10K Ω

Our plant is full of innovation, proprietary equipment that produces high unique Potentiometers. Rather than saying "We don't have" We always prefer to say "let us make it"

MILITARY GRADE, IP 65

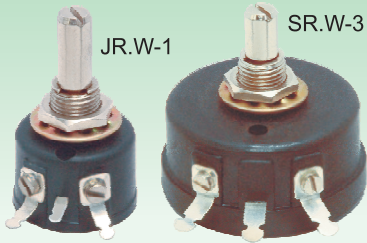


HIGH ENGINEERING PLASTIC SHAFT



R.W-1
19 mm
1 Watt, Res. 25 to 25KΩ
24mm φ x 16mm Height



3 Watt, Res. 25 to 25KΩ
40mm φ x 20mm Height




R.W-3
25 mm

SINGLE TURN WIRE WOUND POTENTIOMETERS



R.W-1
1 Watt, Res. 25 to 25KΩ
24mm φ x 16mm Height



R.W-3
3 Watt, Res. 25 to 25KΩ
40mm φ x 20mm Height



R.W-5
5 Watt, Res. 50 to 50KΩ
48mm φ x 28mm Height




R.W-7.5
7.5 Watt, Res. 50 to 50KΩ
48mm φ x 38mm Height



R.W-15
15 Watt, Res. 50 to 50KΩ
91mm φ x 38mm Height


LINEAR MOTION CONDUCTIVE PLASTIC POTENTIOMETERS

LMP-CP-50..250

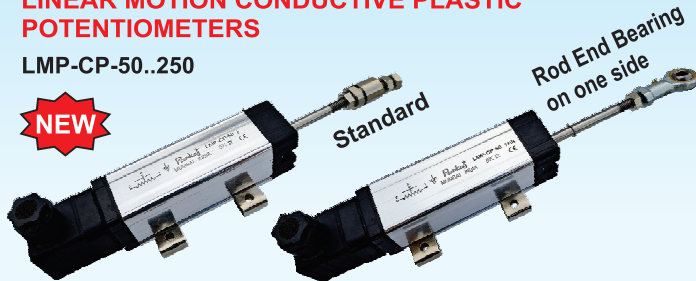

LINEAR MOTION WIRE WOUND POTENTIOMETERS

LMP-WW-50..250

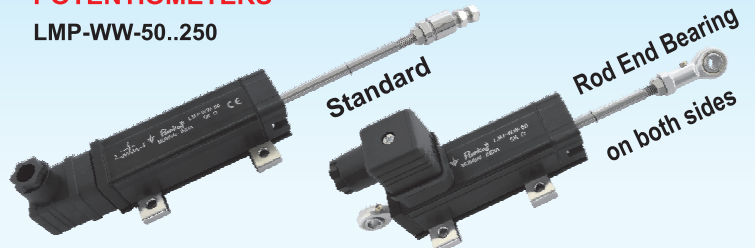

32mm Sq. Aluminium Anodized, S.S. Rod, Solenoid Connector Stroke Length: 50 to 250mm, Resistance Value: 1K, 5K & 10KΩ, Adjustable Mounting Clamp

WIRE WOUND SERVO POTENTIOMETERS

HSS-50



Hollow Shaft
C Clamp for Mounting

SS-50



Standard

15mm Shaft Length
50mmφ, x 30mm Height
Resistance: 100-10KΩ
C Clamp for Mounting

PEDAL OPERATED POTENTIOMETER WITH SWITCH




POP-0417

Switch 10 Amp.
Pedal Potentiometer 5KΩ
Resettable Potentiometer 5KΩ

FOOT OPERATED POTENTIOMETER WITH SWITCH

FOP-5K / 10K

Foot Potentiometer
FPM



Standard



Flat

Switch Rating: 10Amp. @ 230VAC, 2NO + 2NC
Potentiometer: 1K, 5K or 10KΩ



Dome shape

Foot Controller Plastic
FCP-5K



Dimensions, specifications and other details on our website: www.pankaj.com



Manufacturers & Exporters:

Pankaj POTENTIOMETERS PVT. LTD.

201-B, 217, 218 Udyog Mandir No.1, Pitamber Lane, Mahim, Mumbai 400016, India.

Phone: + 91 22 31633520

E-mail: pankaj.potentiometers@gmail.com

Estd : 1959

Note: We reserve the rights to make changes in Designs, Specifications and Functional Modifications at any time without prior notice.